



Card Reader

CardReader eSATAp > CFast

Description

This Delock CardReader can be connected to a Power Over eSATA port, a combination of eSATA and USB. It enables reading and writing of CFast flash drives and the use of the complete SATA transfer rate.


You have two different connecting options:

1. Power Over eSATA Port
2. eSATA Port + USB Port for power supply



Ref. 91676
EAN 4043619916764

Images

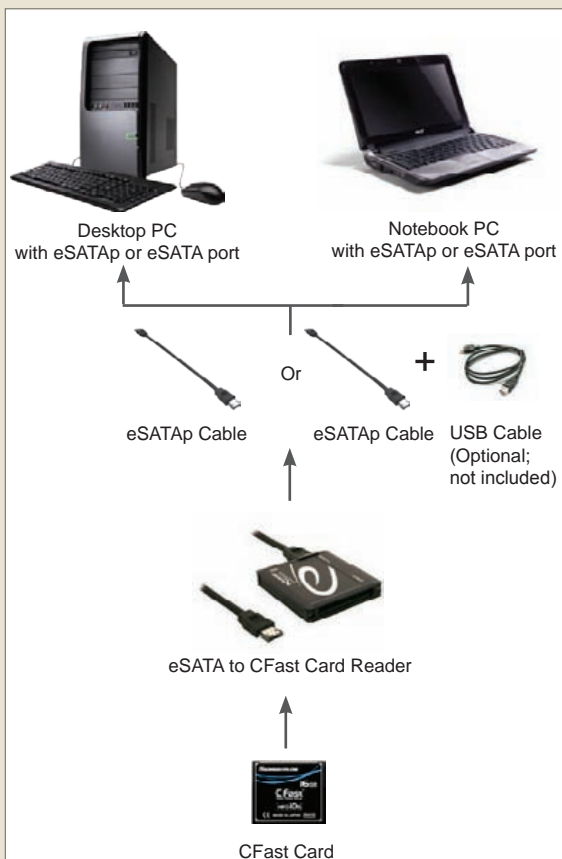

Specification

- Aluminium case
- Connection: Power Over eSATA (eSATAp) 5V, mini USB (power only)
- For CFast type I/II memory cards
- Supports memory cards up to 32GB
- Data transfer rate up to 100 MB/s
- Dimension (LxWxH): 67 mm x 60 mm x 12 mm
- Plug & Play, Hot Swap

System requirements

- Windows ME/2000/XP/Vista/7, Mac OS 10.1.3 or above

Package content

- eSATAp to CFast
- eSATAp cable
- User manual

Package

- Blister