


| VERSION | DESCRIPTION | DRAWN/DATE     | CHECK/DATE         | APPROVAL/DATE      |
|---------|-------------|----------------|--------------------|--------------------|
| 1.0     | NEW RELEASE | Lei/2011/05/09 | Michael/2011/05/09 | Johnson/2011/05/09 |

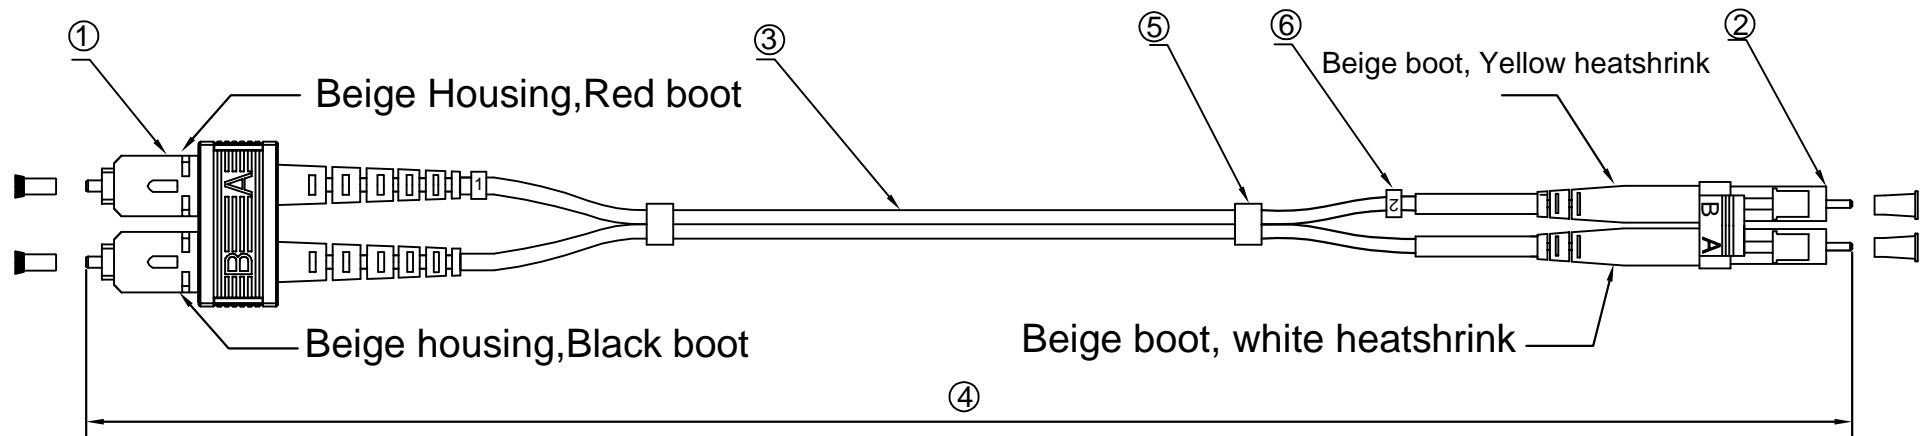

**Specification:**

- 1.Connector Type: SC/PC Multimode
- 2.Connector Type: LC/PC Multimode
- 3.Cable Type:  
Zipcord cable,  $\phi$  1.8mm. 62.5/125um , Multimode,  
Cable Jacket : Orange color, LSZH material
- 4.Length : xM
- 5.Shrink Tube
- 6.Cable Marker

| Part Number | Length |
|-------------|--------|
| LCSC-1M     | 1M     |
| LCSC-2M     | 2M     |
| LCSC-3M     | 3M     |
| LCSC-5M     | 5M     |
| LCSC-10M    | 10M    |
| LCSC-15M    | 15M    |
| LCSC-20M    | 20M    |
| LCSC-xxM    | xxM    |

**Performance:**

- a. Insertion Loss :<0.3 dB
- b. Increase in insertion loss after 500 mating:0.2 dB Max.
- c. Operation Temperature :-20° to +70°
- d. Storage Temperature :-40° to +80°

| UNIT     |  | TITLE  | VERSION |             |
|----------|--|--|---------|-------------|
| mm       |  | DELTA Fiberkablage LC - SC, duplex, multimode, 62,5/125,xxmeters | 1.0     |             |
| P/N.     |  | DRAWN BY   |         | Leinazi     |
| MATERIAL |  | CHECK BY   |         | Michael     |
| SCALE    |  | PAGE   | 1/1     | APPROVAL BY |
| Johnson  |  |  |         |             |

unless otherwise stated  
Tolerances  
mm XXX.XX ±0.3  
XX.XX ±0.2  
X.XX ±0.1  
angular ±2°