


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

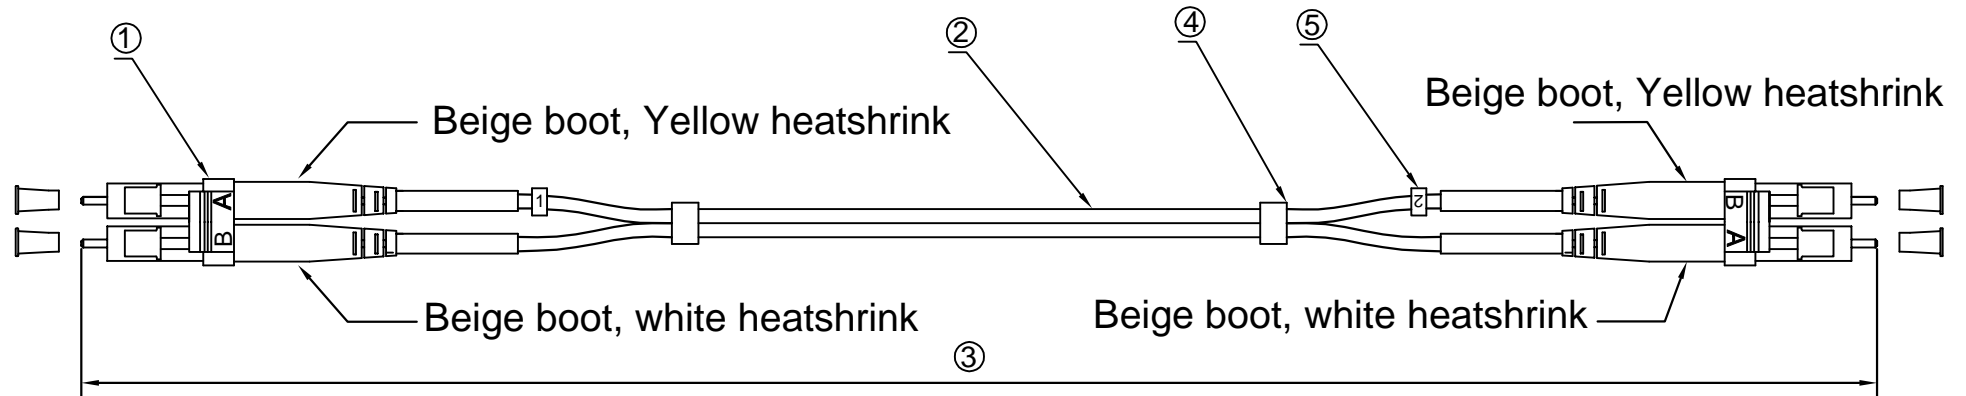

Specification:

- 1.Connector Type: LC/PC Multimode
- 2.Cable Type:
Zipcord cable, ϕ 1.8mm. 50/125um OM3, Multimode,
Cable Jacket : Aqua color, LSZH material
- 3.Length : xM
- 4.Shrink Tube
- 5.Cable Marker

Part Number	Length
LCLC-60	0.5M
LCLC-61	1M
LCLC-62	2M
LCLC-63	3M
LCLC-65	5M
LCLC-67	7M
LCLC-610	10M
LCLC-615	15M
LCLC-620	20M
LCLC-6xx	xxM

Performance:

- a. Insertion Loss :<0.3 dB
- b. Increase in insertion loss after 500 mating:0.2 dB Max.
- c. Operation Temperature :-20° to +70°
- d. Storage Temperature :-40° to +80°

UNIT		TITLE	VERSION	
mm		DELTA CO OM3 fiberkabel LC - LC, duplex, multimode, 50/125, XXmeters	1.0	
unless otherwise stated		P/N.	DRAWN BY	
Tolerances		MATERIAL	CHECK BY	
mm		SCALE	PAGE	APPROVAL BY
XXX.XX \pm 0.3			1/1	Johnson
XX.XX \pm 0.2				
X.XX \pm 0.1				
angular				
\pm 2°				